

Magellan 1100i (USB-COM)

1.




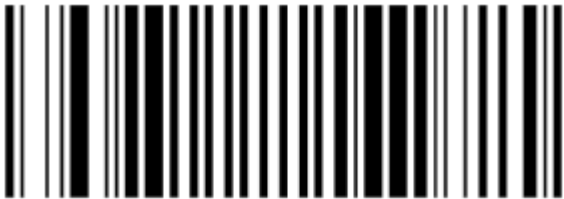
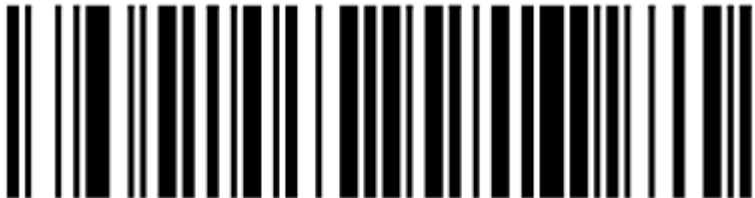
Standard Product Default Set-

2.



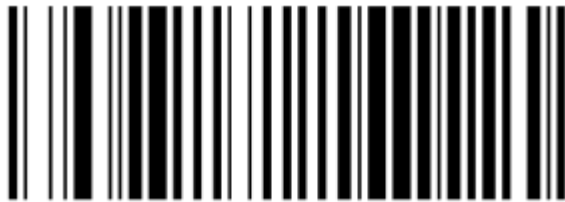


START / END




Magellan 1100i (USB-COM)

3.	 <p data-bbox="738 607 1185 651">Enable Interleaved 2 of 5</p>
4.	 <p data-bbox="746 1182 1185 1227">Enable Datamatrix</p>
5.	 <p data-bbox="759 1787 1165 1832">Enable QR Code</p>

Magellan 1100i (USB-COM)

6.	 Enable Transmission of Control Characters
7.	 USB COM Interface
8.	 Label ID Transmission: Disable

Magellan 1100i (USB-COM)

9.	 Set Prefix
10.	 0
11.	 2

Magellan 1100i (USB-COM)

12.	 START / END
13.	 Set Suffix
14.	 0

Magellan 1100i (USB-COM)

15.	 3
16.	 START / END
17.	 START / END