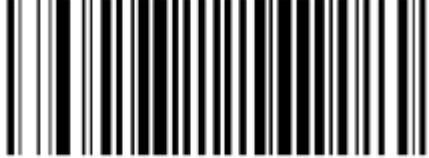
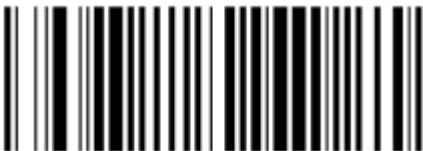
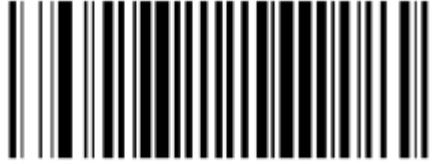





1	 <p>Standard Product Default Settings</p>
2	 <p>Enter/Exit Programming Mode</p>
3	 <p>60msec</p>
4	 <p>Low</p>

Datalogic Magellan 3200VSi

5	 <p>USB COM Interface</p>
6	 <p>Enable Interleaved 2 of 5</p>
7	 <p>Enable QR Code</p>
8	 <p>2D Read Mode = Reads both normal and inverse labels</p>

9	 <p>Label ID Transmission: Disable</p>
10	 <p>Set Prefix</p>
11	 <p>0</p>
12	 <p>2</p>

13	 Enter/Exit Programming Mode
14	 Set Suffix
15	 0
16	 3

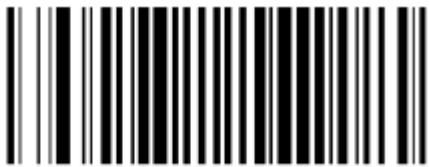17	 Enter/Exit Programming Mode
18	 Enter/Exit Programming Mode